




ROOFGUARD

Basic Roof System

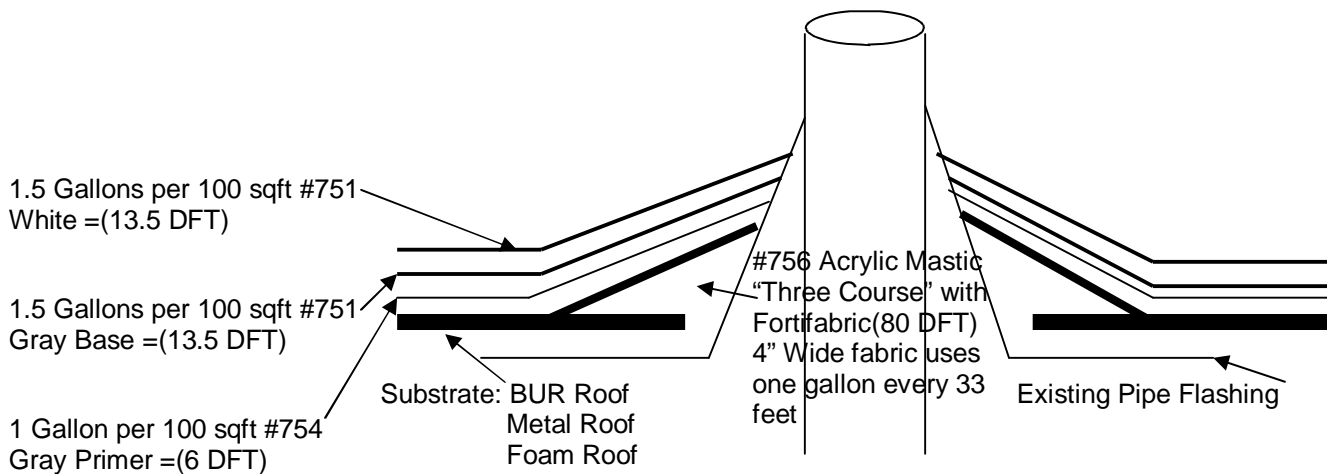

1. Pressure wash existing roof
2. Apply 1 coat of ROOFGUARD ROOFPREP #754 at a rate of 1 gallon per square
3. 3-Course all roof top penetrations using ELASTOGUARD #756 acrylic mastic and FORTIFABRIC
4. Over the ROOFPREP apply 1 coat of ROOFGUARD #751 BASE GRAY at a rate of 1.5 gallons per square
5. After the BASE GRAY dries apply a top coat of ROOFGUARD #751 WHITE or IR color at the rate of 1.5 gallons per square
6. Clean up

TOTAL DFT = 33

21595 Curtis Street • Hayward, CA 94545
(510) 887-7254 • Fax: (510) 887-5637

www.roofguardcoatings.com

Our products are guaranteed to meet established quality control standards and product specification at the time of shipment. Information contained in our technical data is based on laboratory and field testing, but is subject to change without prior notice. No guarantees of accuracy are given or implied, nor does TRESKO assume any responsibility for coverage, performance or injuries resulting from storage, handling or use of our products. Neither seller nor manufacturer has any knowledge or control concerning the purchaser's use. The only obligation of either seller or manufacturer shall be to replace any quantity of this product, which is proved to be defective. Any claim of defective product must be received in writing within one year from date of shipment.