




# ROOF TILE GUARD

## Roof Tile Restoration System

1/2 gallon of **GS2**  
durability glaze coat

1 gallon of **RTC**  
**INFRASHIELD**  
heat reflective color

1/2 gallon of **CS2**  
Primer/Sealer

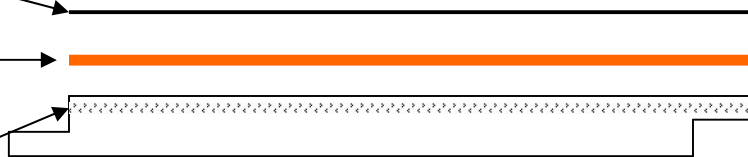

1. Power wash roof being mindful of wind and overspray with each application.
2. Install 1/2 gallon per 100 sq. ft. of **CS2** primer/sealer, allow 1-3 hours to dry at 70° F or when dry to the touch.
3. Install 1 gallon per 100 sq. ft. of **RTC INFRASHIELD** infrared reflective, energy saving color coating, cure time is 8-12 hours at 77° F and 50% humidity.
4. Install 1/2 gallon of **GS2** durability glaze coat, cure time is 8-12 hours at 77° F and 50% humidity.
5. Each coat must be dry before application of the next.

Dry time is dependent on temperature and humidity.

Only install coatings on days where they can dry before rain or dew. Never install when rain is forecasted within 48 hours.

If the roof is on spaced sheathing, be careful around flashings, hips, ridges, broken tiles and valleys. The force of power washing or spraying the coatings may leak into the attic.

These are recommended minimum quantities. The porosity of the tile may require additional gallons to properly cover.

21595 Curtis Street • Hayward, CA 94545  
(510) 887-7254 • Fax: (510) 887-5637

[www.roofguardcoatings.com](http://www.roofguardcoatings.com)

Our products are guaranteed to meet established quality control standards and product specification at the time of shipment. Information contained in our technical data is based on laboratory and field testing, but is subject to change without prior notice. No guarantees of accuracy are given or implied, nor does TRESKO assume any responsibility for coverage, performance or injuries resulting from storage, handling or use of our products. Neither seller nor manufacturer has any knowledge or control concerning the purchaser's use. The only obligation of either seller or manufacturer shall be to replace any quantity of this product, which is proved to be defective. Any claim of defective product must be received in writing within one year from date of shipment.