



ROOFGUARD

Premium Roof System

#751 White or color
3 Gallons per 100
sqft = 27 DFT


#751 Gray Base
2 Gallons per 100
sqft = 18 DFT

One layer of
Polyester Fabric
Tietex T272

#751 Gray Base
2 Gallons per 100
sqft = 18 DFT

#754 Gray Primer
1 Gallon per 100
sqft = 6 DFT

Total Waterproofing
Protection
69 DFT !

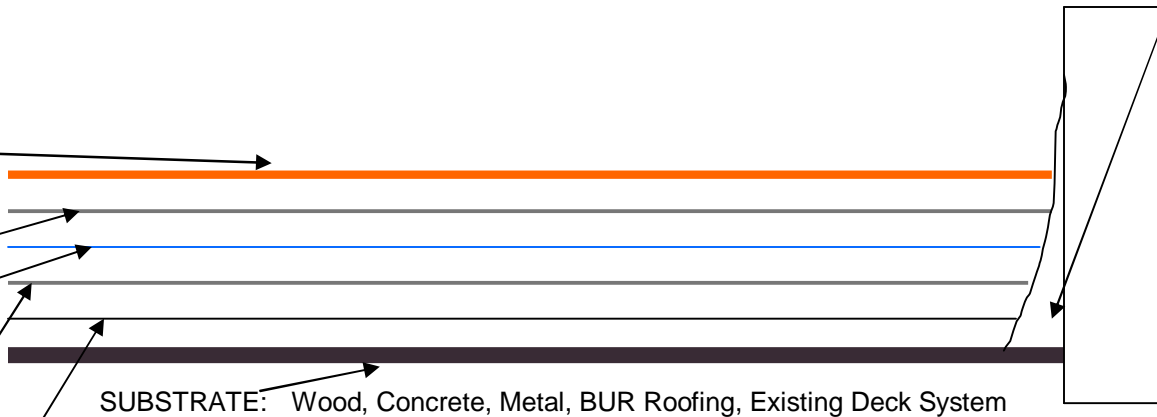

Post, Wall,
Edge,
cracks etc.
Any
transition
from the
deck surface
3 course
with #756
acrylic
mastic and
Fortifabric
= 80 DFT

SUBSTRATE: Wood, Concrete, Metal, BUR Roofing, Existing Deck System

1. Pressure wash existing roof
2. 3-Course all roof top penetrations using ELASTOGUARD # 756 acrylic mastic and FORTIFABRIC
3. Apply ROOFPREP #754 at a rate of 1 gallon per square
4. Apply one coat of ROOFGUARD #751 BASE GRAY at a rate of 2 gallons per square
Immediately embed full sheets of 40" ROOFGUARD FORTIFABRIC polyester fabric into the BASE GRAY to reinforce entire field, wall and waterway surfaces
5. Immediately apply BASE GRAY at a rate of 2 gallons per square over the polyester fabric
6. After the #751 Base Gray is dry apply two separate coats (first coat must be dry before applying the second coat) of ROOFGUARD #751 WHITE or IR COLOR at a rate of 1.5 gallons per square. A non skid texture can be added in the last coat by broadcasting #30 sand to refusal or add one quart of sand per gallon and apply with a textured roller or apply last coat with a textured roller only.
7. Clean up

21595 Curtis Street • Hayward, CA 94545
(510) 887-7254 • Fax: (510) 887-5637

www.roofguardcoatings.com

Our products are guaranteed to meet established quality control standards and product specification at the time of shipment. Information contained in our technical data is based on laboratory and field testing, but is subject to change without prior notice. No guarantees of accuracy are given or implied, nor does TRESKO assume any responsibility for coverage, performance or injuries resulting from storage, handling or use of our products. Neither seller nor manufacturer has any knowledge or control concerning the purchaser's use. The only obligation of either seller or manufacturer shall be to replace any quantity of this product, which is proved to be defective. Any claim of defective product must be received in writing within one year from date of shipment.